Multi channel LED Dimmer

MVC-16-Dimmer

PWM LED dimmer for 2x8 channels constant voltage / constant current LED strips, COB or LED modules




technical specification


Voltage input range	1x 230 VAC
Input current	4A / 2xMVC-16 @ 16A Type C Breaker
Output	8 x 2 - 16 Outputs constant current / constant voltage configurable @Order @LDDE CC1A (max. 1A) / CC2A (max 2A) / CV (max 4A)
USITT DMX 512/1990	✓ | (KNX / DALI on request)
Control channels	1 / 16 – 2 / 32
Dimmer Output	16 -bit
PWM Frequency	1500 / 3000 | HDTV tauglich
Supply Voltage	2 Slots Configurable @Order @LDDE | 12 / 24 / 48 V
DMX hold	✓
Fade to Zero	✓
Manual mode	✓
Display & rotarypush button	2x16 Characters | ✓
Metal housing powder coated	✓
Weight / Dimension	max. 5200g Wall Mount W x L x H 493 x 381 x 47,5 mm 19“ 483 x 381 x 43,5 mm (1HE+1HE empty above)
Connections Data/Power	Connector IN 0,2-1,0 mm^2 (Push in Terminals) Connector OUT 0,2-2,5 mm^2 (Push in Terminals) TRUE ONE IN/OUT
Protection Class – IP20	✓
Operating temperature	0°C to 50°C
Conformity	EN 55015, EN 61547, EN 61000-6-2 EN 61000-6-4, EN 61000-3-2, EN 61000-3-3


Green
LED products from
AUSTRIA

LDDE
LIGHTING IDEAS

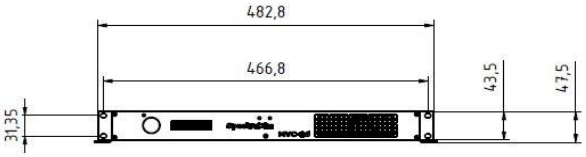



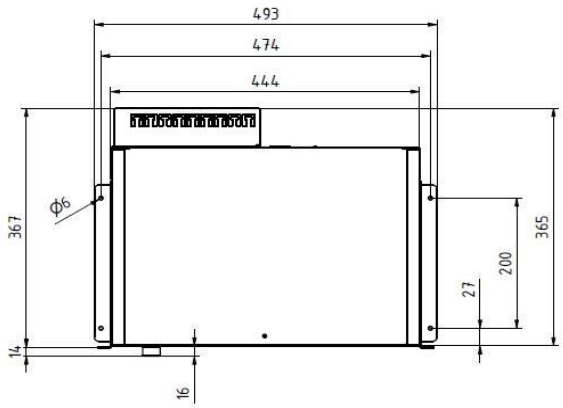





Anzeige und Dreh-Drückknopf

DIE ANZEIGE BESTEHT AUS 2X16 ZEICHEN. DIE BEDIENUNG ERFOLGT KOMFORTABEL MIT DEM FÄRBIG LEUCHTENDEN DREH UND DRÜCKKNOPF

Display / rotary-push-encoder

THE DISPLAY HAS 2 X16 CHARACTERS. OPERATION IS CONVENIENT WITH THE BRIGHTLY COLORED ROTARY AND PUSH BUTTON