LED SOFTLIGHT

SpectraMasterD 1000

Dynamic White High Power






TECHNICAL SPECIFICATION

Voltage input range	200...240 VAC 50/60 Hz
Power consumption	max. 55W
5-pin Power/Data multicore connector	✔
Light Source/Color Mixing System	WW,CW 336 LED´s
Lumen	~5600 lm
Color Temperature	2700-6000K
Remote + BCD Rotary Switch for Addressing and Settings	✔
Control/Wiring	USITT DMX512/1990v
Control Channels	1/2/3/4/5
8/16-bit Resolution	✔
Modulation	PWM or **NON PWM**
High Resolution Dimmer from 0–100%	✔
Suitable for HDTV „flicker-free“	✔
up to 25 Hz Strobe frequency	✔
Convection Cooling for silent operation	✔
Aluminium extrusion profile	✔
Class	IP20
Weight / Dimension	~1,5kg / L 1000 x H 60,5 x W 34 mm
Conformity	CE, EN 61000-3-2, EN 61000-3-3, EN 55015, N 60529


a green product from AUSTRIA

LDDE LIGHTING IDEAS



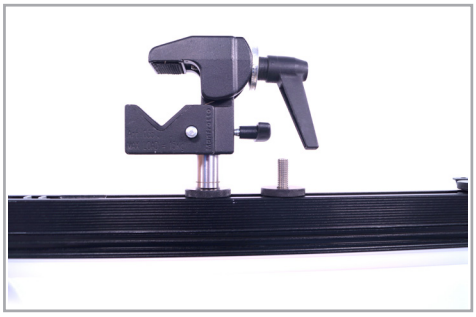



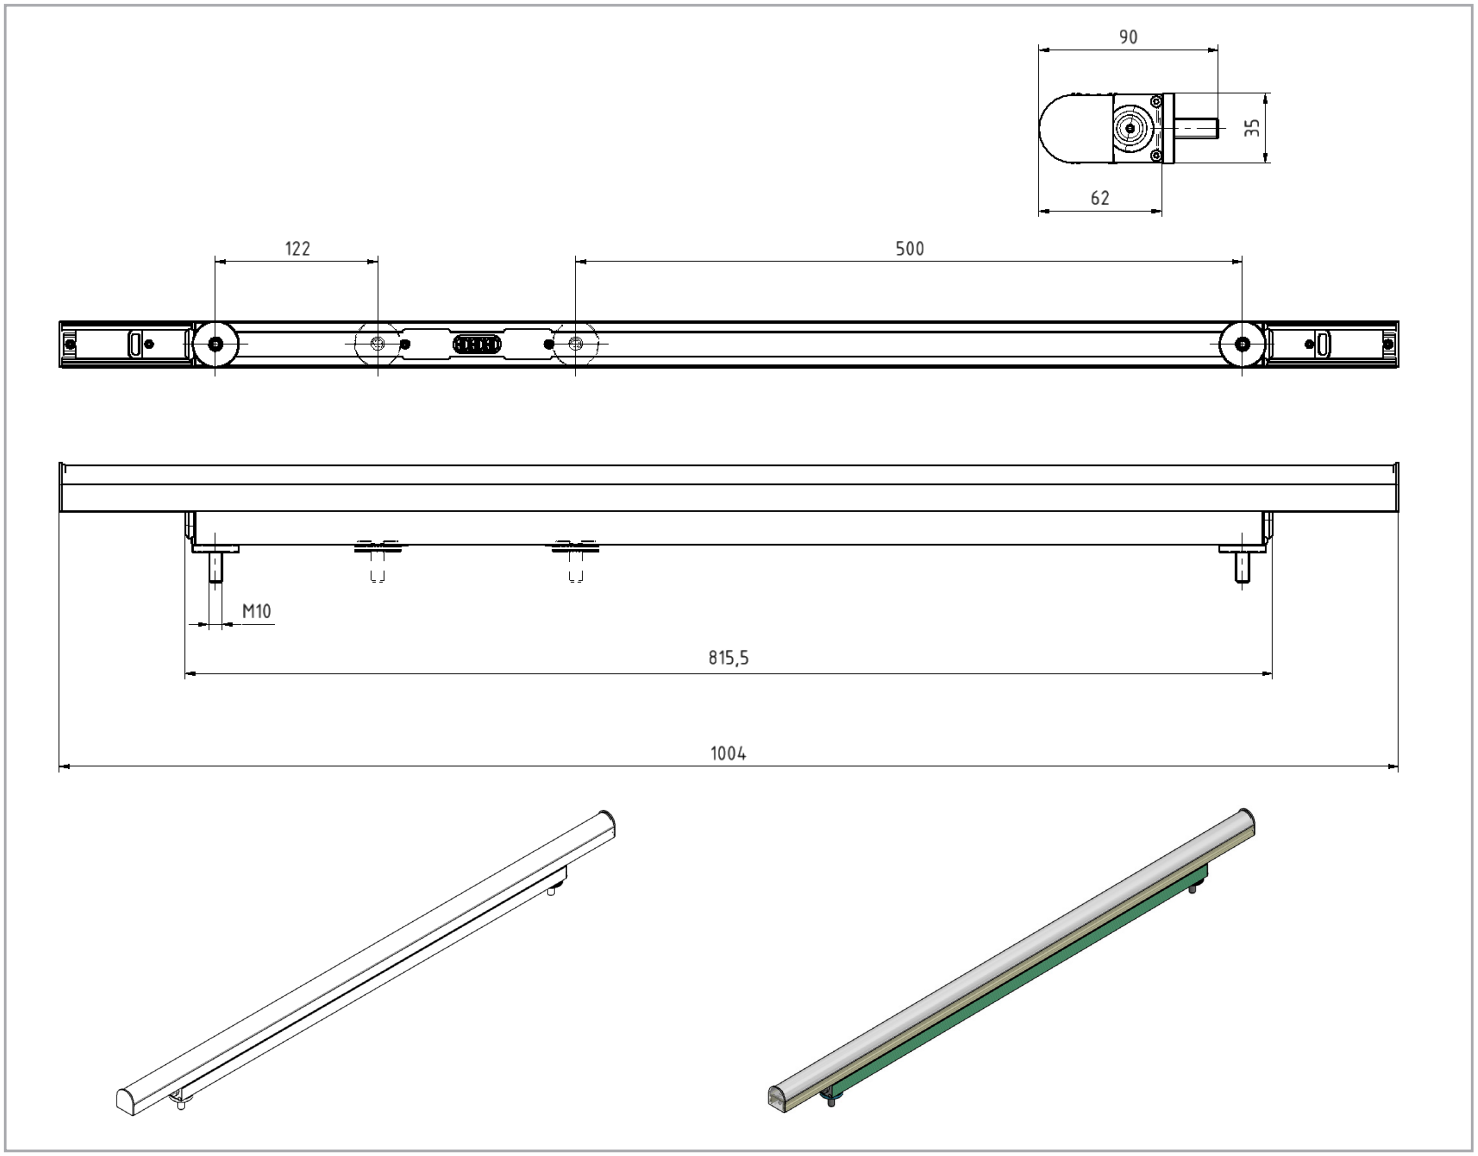

LDDE
LIGHTING IDEAS

Lighting
Design
Development
Electronics

LDDE Vertriebsgesellschaft m. b. H.
Simmeringer Hauptstr. 357, 1110 Vienna, Austria
P: +43 1 7671811 0, F: +43 1 7671811 99
E: office@ldde.com, W: www.ldde.com

E&OE LDDE Vertriebs GmbH reserves the right, without prior notice, changes to the products, as well as price chages. Copyright LDDE Vertriebs GmbH 2017

60010014001