

SpectraDim104 Touch

PWM LED dimmer for constant voltage LED 10 Output up to 4A each



TECHNICAL SPECIFICATION




Voltage input range	2 × 12–48 VDC
Input current	2 × 20 A max.
Output	10 Outputs max. 4 A per Channel
USITT DMX512/1990	✓
Control channels	1 / 2 / 10 / 20
Dimmer Input/Output:	Input 8/16-bit Output 16-bit
PWM Frequency	1500, 3000 kHz
Variable dimmer characteristic	✓
DMX hold	✓
Fade to Zero	✓
User Interface	Touchscreen
RDM	✓
Manual- / Standalone mode	✓ ✓
order	Wallmount 20050310932 Din-rail mount 20050310933
Weight / Dimension	aprox. 320 g 178 × 97 × 35,2 mm (L × W × H)
Connections Data / Power	Screwterminals 0,2–2,5 mm ² flexible 0,2–6mm ² flexible
Protection Class - IP20	✓
Operating temperature	0 °C to 50 °C
Conformity	EN 55015, EN 61547, EN 61000-6-2 EN 61000-6-4, EN 61000-3-2, EN 61000-3-3

Option wallmount




Status LED

Update connector DMX In/Thru

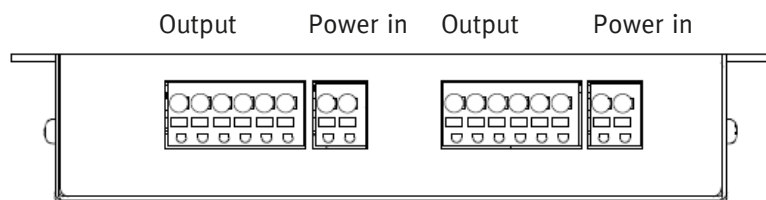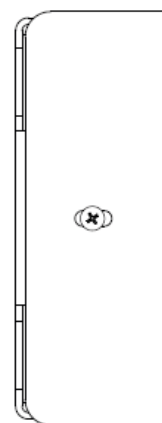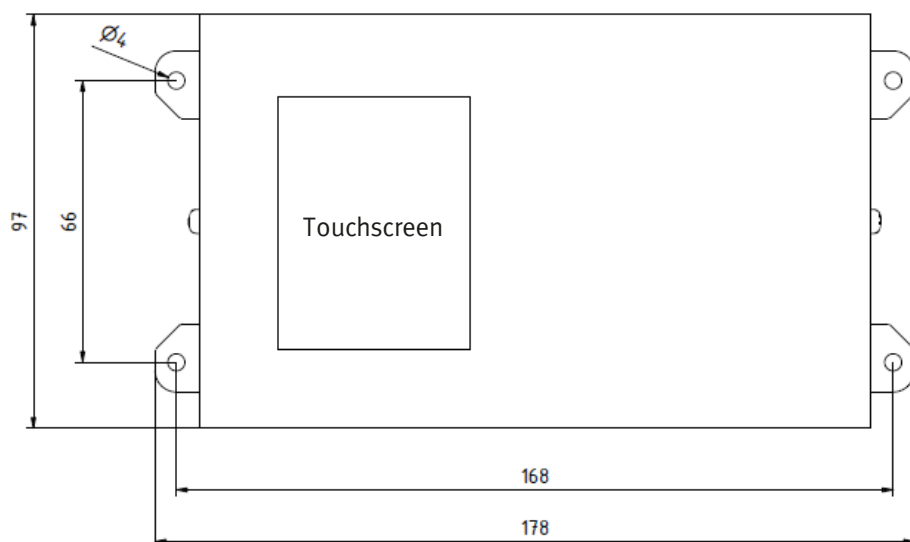

Option DIN-rail mount

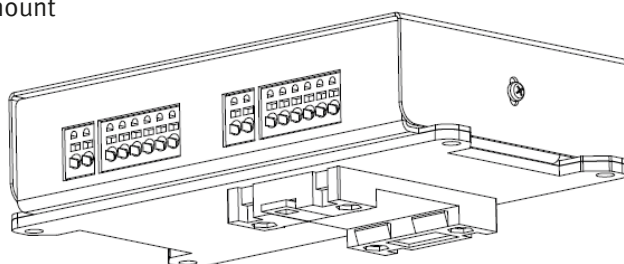

Settings

All Settings can be reached via touchscreen.